

Argus / Bombe




Argus

Altezza Height H	Largh. Width L	Codice articolo Code	Interas. Con.cent N	Peso Weight P	Conten. d'acqua Capacity	Esp. n	Resa Term. Power En442 $\Delta t=50K$ 75/65/20°C (W)
(mm)	(mm)		(mm)	(Kg)	(l)		
1800	275	E1500180030 44	1770	13,20	1,60	1,28	944
1800	345	E1500180035 44	1770	16,50	2,00	1,28	1180
1800	415	E1500180040 44	1770	19,80	2,40	1,28	1416


Bombe

Altezza Height H	Largh. Width L	Codice articolo Code	Interas. Con.cent N	Peso Weight P	Conten. d'acqua Capacity	Esp. n	Resa Term. Power En442 $\Delta t=50K$ 75/65/20°C (W)
(mm)	(mm)		(mm)	(Kg)	(l)		
1800	275	E1600180030 44	1770	11,70	1,40	1,28	1044
1800	345	E1600180035 44	1770	14,60	1,80	1,28	1305
1800	415	E1600180040 44	1770	17,50	2,10	1,28	1566

Argus

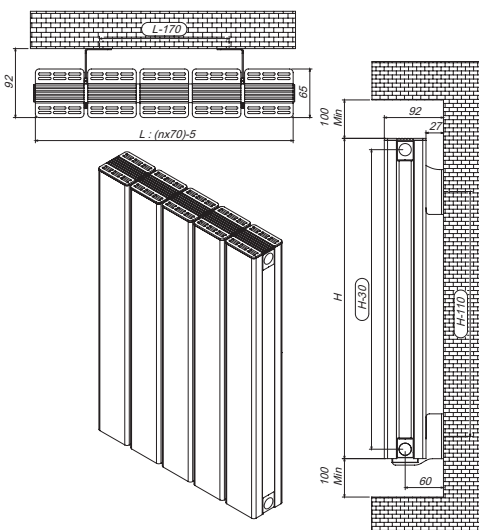

Bombe

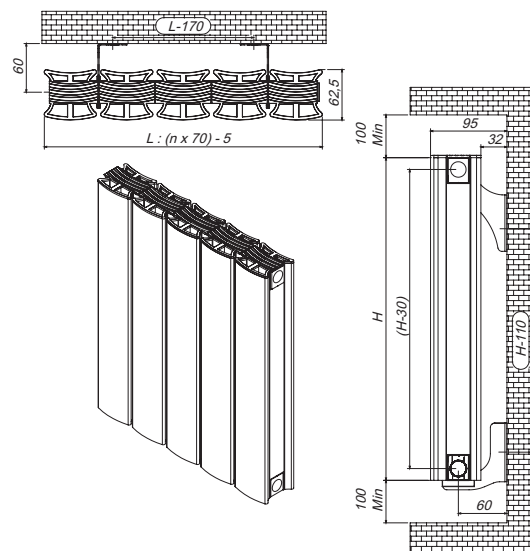

ATTENZIONE: Il radiatore è provvisto di diaframma a corredo per installazione con andata e ritorno in basso. Per l'installazione con andata in alto e ritorno in basso o monotubo non installare il diaframma. Per informazioni contattare il ns. ufficio tecnico.

Esempio di ordinazione: E1500180030 44 = mod. Argus, altezza 1800 mm x larghezza 275 mm, colore Ral 9016.

ATTENTION: The radiator is equipped with a diaphragm for installation with a round-trip bottom. Do not install the diaphragm for top-up and bottom-down or single-pipe installation. For information contact our technical office.

Ordering example: E1500180030 44 = mod. Argus, height 1800 mm x width 275 mm, color Ral 9016.